

Plug with hexagon socket with flat packing ring - high pressure application



BODY MATERIAL White Zinc-plated Steel

(1) FLAT PACKING RING NBR

RANGE TEMPERATURE -10 +80 [°C] ; +14 +176 [F]

DESCRIPTION

Plug with hexagon socket with flat packing ring for application with high pressure.

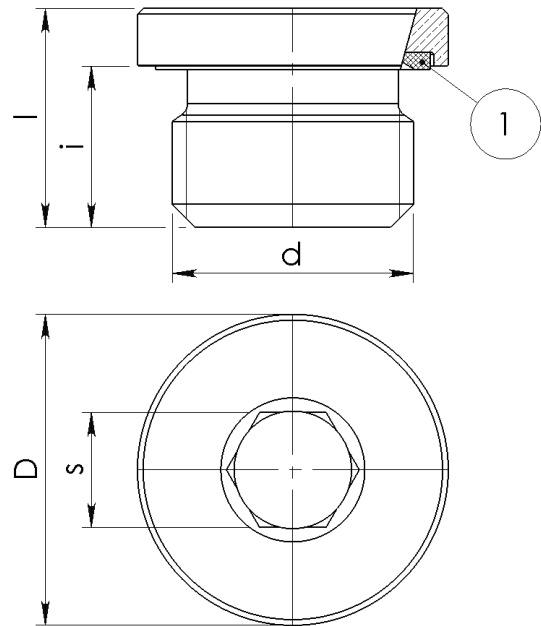

Article	d	i[mm]	D[mm]	s[mm]	l[mm]	p max[bar]	Cs max [Nm]	weight[g]
020300001	G1/8	8	14	5	12	600	8	7,5
020300002	G1/4	12	19	6	17	600	11	19,3
020300003	G 3/8	12	22	8	17	600	15	27,1
020300004	G 1/2	14	27	10	19	600	19	44,3
020300005	G 3/4	16	32	12	21	600	25	80
020300006	G 1	16	40	17	22,5	600	33	130
020300015	G 1 1/4	16	49	22	22,5	600	57	200
020300016	G 1 1/2	16	55	24	22,5	600	57	263,4
020300007	M10X1	8	14	5	12	600	8	7,5
020300008	M12X1,5	12	17	6	17	600	10	15,2
020300009	M14X1,5	12	19	6	17	600	12	20,5
020300010	M16X1,5	12	22	8	17	600	14	23,8
020300011	M18X1,5	12	24	8	17	600	16	28
020300012	M20X1,5	14	26	10	19	600	18	44,5
020300013	M22X1,5	14	27	10	19	600	20	46