

N**®**STRALI®

Safety valve NA G 1/2 set

BODY MATERIAL Brass
(1) SEAL NBR or FKM or GLT or EPDM or HNBR
(2) PRESSURE REGULATOR Brass
(3) SPRING C98 or INOX AISI 302 or INOX AISI 316
(4) REGULATOR Brass
(5) PROTECTION CAP Brass
RANGE TEMPERATURE -60 +150 [°C] ; -40 +482 [F] max


DESCRIPTION

NA" model safety valvefor air compressors, pneumatic circuits or other air or steam pressure vessels. This model discharges the fluid directly into the atmosphere. The safety valvecan be customised by setting pressure, fitting/thread, bodymaterial, sealer compound, spring, with or without CE certification, with or without inspection ring."







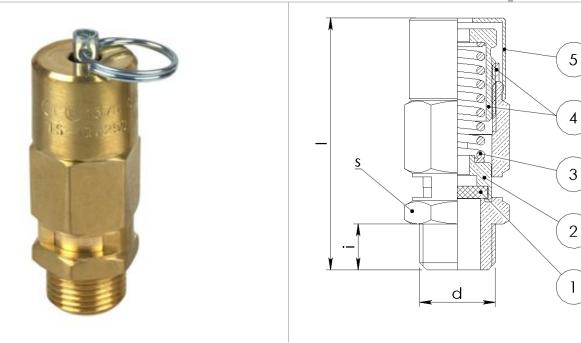

Article	d	i[mm]	s[mm]	l[mm]	weight[g]
210109993	G 1/2	10	22	55 ~	120