


One way valve,double seal version, female-female made of stainless steel

**BODY MATERIAL** Stainless steel  
**(1) PRESSURE REGULATOR** Stainless steel  
**(2) SPRING** Stainless steel  
**(3) SPACER** Stainless steel  
**(4) SPHERE** Stainless steel  
**(5) OR OR FLAT PACKING RING** FKM  
**SET PRESSURE** ~ 0,3 bar  
**RANGE TEMPERATURE** -10 +150 [°C] ; +14 +302 [F]

**DESCRIPTION**  
Uni-directional valve with exclusive double sealing system: a metal ball against the O-Ring ensures sealing at low pressure; at high pressure, the OR warps, stretches out, and the metal ball ensures sealing directly on the valve body.

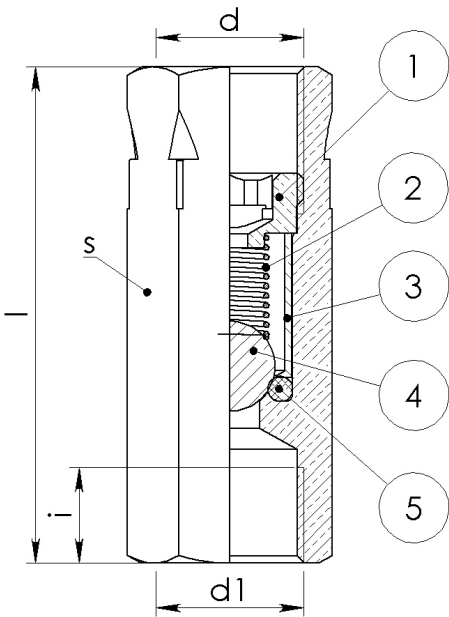

Article	d	d1	s[mm]	l[mm]	weight[g]
310200010	G1/4	G1/4	17	50	70