


## 36B.Z

## Magnetic screw plug with hexagon socket made of zinc plated steel with neodymium magnet

BODY MATERIAL White Zinc-plated Steel


(1) PERMANENT MAGNET Neodymium

RANGE TEMPERATURE +80 [°C] max ; +176 [F] max



## DESCRIPTION

Magnetic screw plug with hexagon socket made of zinc plated steel. The dimensions of the body plug refer to DIN 908. The permanent magnet attracts and holds abrasive, ferrous metal particles preventing their circulation through the lubrication or hydraulic system. The magnetic "filter" plug is recommended for gearboxes and in any application with gears in bath of oil.

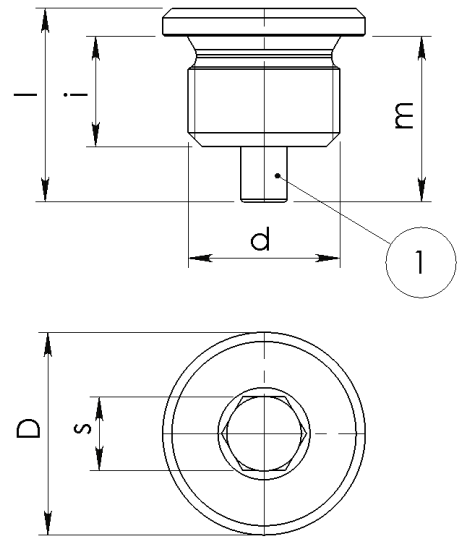

Article	d	i[mm]	D[mm]	s[mm]	l[mm]	m[mm]	weight[g]
110400207	G1/4	12	18	6	21	18	16
110400034	G 3/8	12	22	8	21	18	25
110400020	G 1/2	14	26	10	24	20	42
110400022	G 3/4	16	32	12	26	22	70
110400165	G 1	16	39	17	27	22	126
110400038	M14X1,5	12	19	6	21	18	19
110400024	M18X1,5	12	23	8	20	16	33
110400031	M22X1,5	14	27	10	24	20	45
110400030	M30X2	16	36	17	26	22	92