

# 14A-R

## Safety valve NA vertical piped discharge

**BODY MATERIAL** Brass

**(1) SEAL** NBR or FKM or GLT or EPDM or HNBR

**(2) PRESSURE REGULATOR** Brass



**(3) SPRING** C98 or INOX AISI 302 or INOX AISI 316

**(4) REGULATOR** Brass

**RANGE TEMPERATURE** -60 +150 [°C] ; -40 +482 [F] max

### DESCRIPTION

The conveyed discharge safety valve, with axial fitting for pipe, prevents the fluid from being discharged directly into the atmosphere. Designed for applications handling steam or other potentially dangerous fluids.

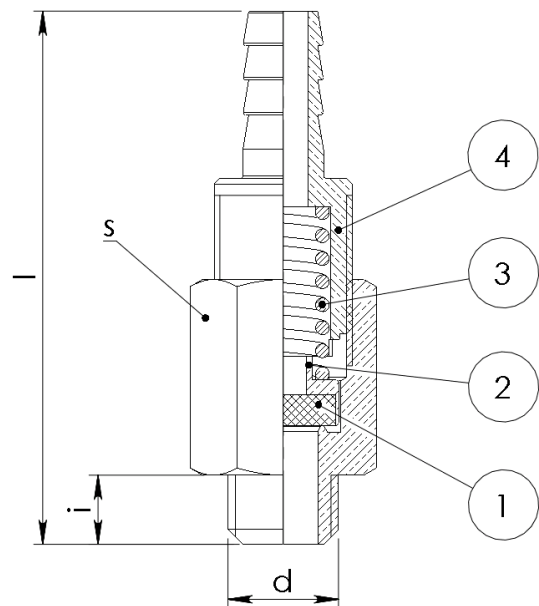

Article	d	i[mm]	s[mm]	l[mm]	weight[g]
220109990	G1/8	6	14	47,5~	30