


Safety valve NA lateral piped discharge

- BODY MATERIAL** Brass  
**(1) BARB** Brass  
**(2) SEAL** NBR or FKM or GLT or EPDM or HNBR  
**(3) PRESSURE REGULATOR** Brass  
**(4) SPRING** C98 or INOX AISI 302 or INOX AISI 316  
**(5) REGULATOR** Brass  
**(6) PROTECTION CAP** Brass  
**RANGE TEMPERATURE** -60 +150 [°C] ; -40 +482 [F] max

DESCRIPTION

The conveyed discharge safety valve, with fitting for pipe, prevents the fluid from being discharged directly into the atmosphere. Designed for applications handling steam or other potentially dangerous fluids. By rotating the ring, the valve locks into the permanently open" position."

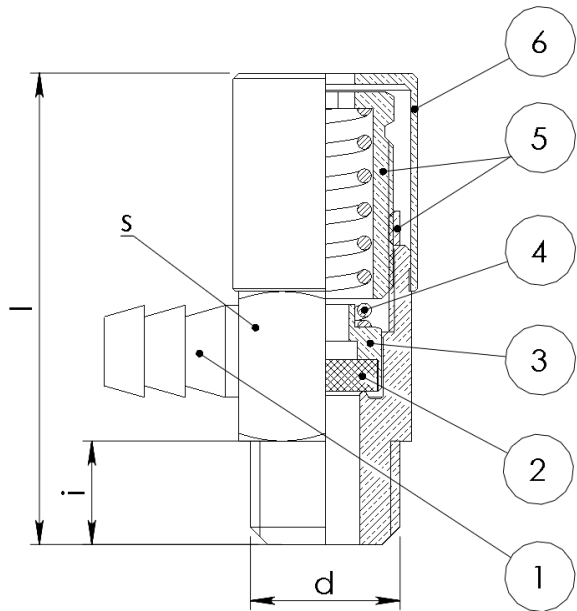

Article	d	i[mm]	s[mm]	l[mm]	weight[g]
220309990	G1/4	9	15	41~	50