
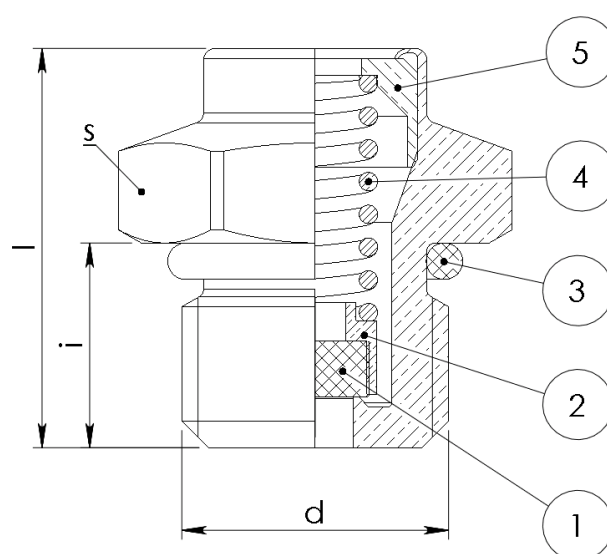


14G

## Safety valve for LPG and CNG systems

**BODY MATERIAL** Brass**(1) SEAL** NBR or FKM or GLT or EPDM or HNBR**(2) PRESSURE REGULATOR** Brass**(3) OR OR FLAT PACKING RING** NBR or FKM or GLT or EPDM or HNBR**(4) SPRING** C98 or INOX AISI 302 or INOX AISI 316**(5) REGULATOR** Brass**RANGE TEMPERATURE** -60 +150 [°C] ; -40 +482 [F] max**DESCRIPTION**

Safety valve for LPG & CNG alternative automotive fuel systems. To ensure maximum reliability of the product, the valves are 100% controlled at setting pressure and at the discharge flow rate. They can be customised by sealing compound, spring, setting pressure as well as for minimum and maximum discharge flow rate.



Article	d	i[mm]	s[mm]	l[mm]	weight[g]
230209990	G1/4	10	17	19,5~	20
230209991	M12X1	10	17	19,5~	20