

14G-R

Safety valve with pipe discharge for LPG and CNG systems

BODY MATERIAL Brass

(1) SEAL NBR or FKM or GLT or EPDM or HNBR

(2) PRESSURE REGULATOR Brass

(3) OR OR FLAT PACKING RING NBR or FKM or GLT or EPDM or HNBR



(4) SPRING C98 or INOX AISI 302 or INOX AISI 316

(5) BARB Brass

RANGE TEMPERATURE -60 +150 [°C] ; -40 +482 [F] max

DESCRIPTION

Safety valve for as well as LPG and CNG systems with conveyed discharge. To ensure maximum reliability of the product, the valves are 100% controlled at setting pressure and at the discharge flow rate. They can be customised by sealing compound, spring, setting pressure as well as for minimum and maximum discharge flow rate.

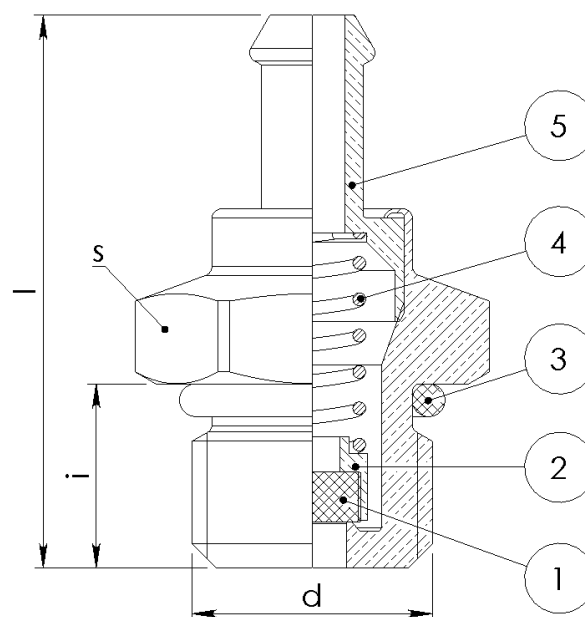

Article	d	i[mm]	s[mm]	l[mm]	weight[g]
230209992	G1/4	10	17	30~	23
230209993	M12X1	10	17	30~	23