

# 14G-T

## Safety valve with pipe discharge for LPG and CNG systems

**BODY MATERIAL** Brass

**(1) SEAL** NBR or FKM or GLT or EPDM or HNBR

**(2) PRESSURE REGULATOR** Brass

**(3) OR OR FLAT PACKING RING** NBR or FKM or GLT or EPDM or HNBR



**(4) SPRING** C98 or INOX AISI 302 or INOX AISI 316

**(5) BARB** Brass

**RANGE TEMPERATURE** -60 +150 [°C] ; -40 +482 [F] max

### DESCRIPTION

Safety valve for reduction gears as well as LPG and CNG systems with conveyed discharge. To ensure maximum reliability of the product, the valves are 100% controlled at setting pressure and at the discharge flow rate. They can be customised by sealing compound, spring, setting pressure as well as for minimum and maximum discharge flow rate.

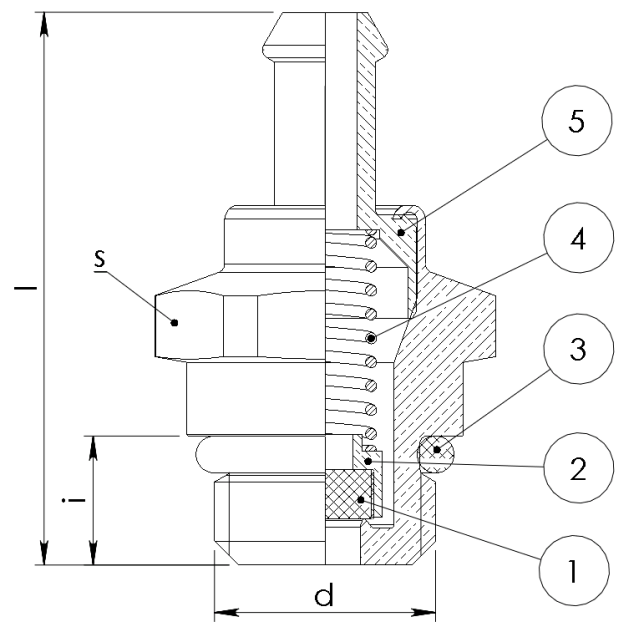

Article	d	i[mm]	s[mm]	l[mm]	weight[g]
230209994	M12X1,25	7	17	30~	23