

One way valve, double seal version, female-female made of brass

BODY MATERIAL Brass

(1) PRESSURE REGULATOR Brass

(2) SPRING Stainless steel

(3) SPACER Brass

(4) SPHERE Stainless steel


(5) OR OR FLAT PACKING RING FKM

SET PRESSURE ~ 0,3 bar

RANGE TEMPERATURE -10 +150 [°C] ; +14 +302 [F]

DESCRIPTION

Uni-directional valve with exclusive double sealing system: a metal ball against the O-Ring ensures sealing at low pressure; at high pressure, the OR warps, stretches out, and the metal ball ensures sealing directly on the valve body.

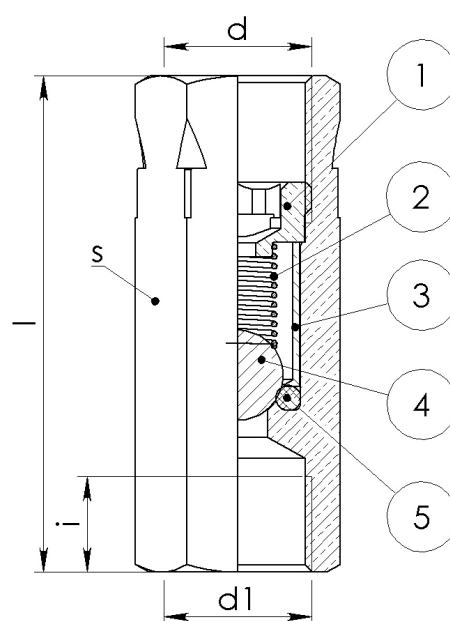

Article	d	d1	s[mm]	l[mm]	weight[g]
310200004	G1/8	G1/8	13	44	35
310200001	G1/4	G1/4	17	50	77
310200002	G 3/8	G 3/8	20	56	108
310200003	G 1/2	G 1/2	25	70	200