


One way valve,double seal version, female-female made of stainless steel

BODY MATERIAL Stainless steel
(1) PRESSURE REGULATOR Stainless steel
(2) SPRING Stainless steel
(3) SPACER Stainless steel
(4) SPHERE Stainless steel
(5) OR OR FLAT PACKING RING FKM
SET PRESSURE ~ 0,3 bar
RANGE TEMPERATURE -10 +150 [°C] ; +14 +302 [F]

DESCRIPTION
Uni-directional valve with exclusive double sealing system: a metal ball against the O-Ring ensures sealing at low pressure; at high pressure, the OR warps, stretches out, and the metal ball ensures sealing directly on the valve body.

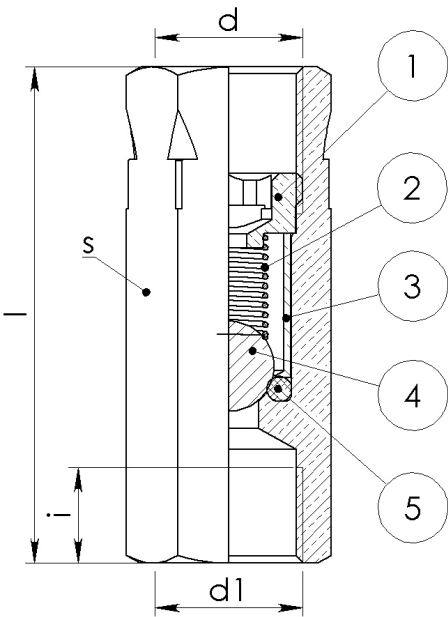

Article	d	d1	s[mm]	l[mm]	weight[g]
310200010	G1/4	G1/4	17	50	70