

33A.IP65

Breather plug inner valve version made of brass. IP65 approved

BODY MATERIAL Brass


(1) SEAL FKM

(2) SPRING Stainless steel

(3) PROTECTION CAP White Zinc-plated Steel


SET PRESSURE ~ 0,25 bar

RANGE TEMPERATURE -10 +150 [°C] ; +14 +302 [F]



DESCRIPTION

The breather plug is designed to maintain safe, equalized pressure in a unit even when it is under sudden changes in ambient temperature. This model has a valve inside. This system allows the expulsion of the exceeding air in the reservoir, thus re-establishing the pressure setting of the breather. In off-road application it decreases the risk of oil leakage from the unit. The cap protects from foreign bodies which may enter into the mechanical equipment and may cause damages.

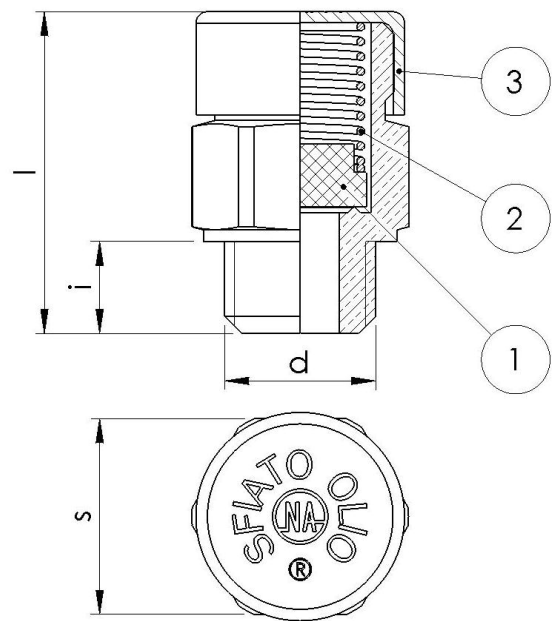

| Article | d | i[mm] | s[mm] | l[mm] | weight[g] |
|-----------|-------|-------|-------|-------|-----------|
| 130400078 | G1/4 | 8 | 17 | 28 | 32 |
| 130400128 | G 3/8 | 8 | 20 | 28 | 35 |
| 130400465 | G 1/2 | 10 | 24 | 29 | 59 |
| 130400464 | G 3/4 | 12 | 32 | 35 | 102 |
| 130400463 | G 1 | 13 | 40 | 43 | 214 |